



## Installation Manual


1. Mark and drill bores by using the installation template.
2. Unplug the power cord the inside panel. By pushing the buckle to 90 degrees.

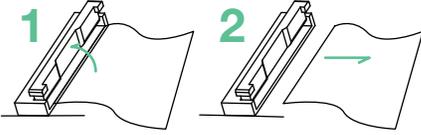

3. Fix 2 screw bolts on the front panel.
4. Pass the flat cable through the door and make the front panel fit against the door closely.
5. Install mounting plate with 2 fixing screws tightly against the door surface.





- 
6. Connect the cable into the inside panel. By placing the steel plate side down and insert into the socket and then press the buckle down.
  7. Attach the inside panel to the mounting plate. Then fasten all 3 screws and close the lid.

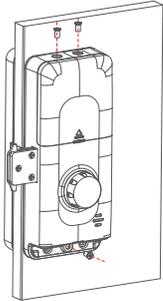

8. Install the striking plate according to the door pattern.  
There are 2 types of striking plates provided.

1. Surface mounting, can be mounted either by using screw bolts and attach directly to the door jamb.
2. Flush mounting.

Flush mounting plate      Recommended bore size

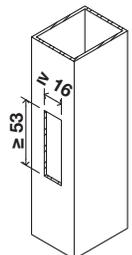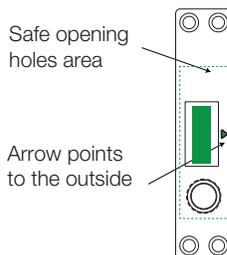

9. Put all 4 alkaline batteries and then test the operation.